
Bighands Building Supply Australia Pty Ltd
60-68 Hampstead Road Auburn NSW 2144
p: 1300 242 799
e:info@bighandsbuildingsupplies.com.au
w: bighandsbuildingsupplies.com.au

Product Catalogue

Insulated EPS Roof & Wall Panels



INSULATED EPS ROOF & WALL PANELS

What are insulated EPS roof & wall panels used for?

EPS roof panels are insulated roofing panels which incorporates roof, insulation and ceiling, making it a unique 3-in-1 roofing system. It provides an attractive, internal off-white colored steel lining that is maintenance free.

EPS wall panels are insulated sandwich panels made up of two steel faces bonded to an expanded polystyrene insulating core. It's a unique light, cost-effective construction material used for both free standing and load bearing panels.

Benefits of insulated EPS panels:

- ✓ Innovative "Seam Look" system eliminates unsightly joints
- ✓ Easy to install
- ✓ Each roof panel spans up to 5m long unsupported
- ✓ Ideal for patio enclosures and carports
- ✓ Easy cable access and safe electrical ducts
- ✓ Available in Trimdek roofing profile

Fixing Recommendations for Roof Panels

C Insulated roofing should be laid into the prevailing wind and sit neatly on the preceding roof sheet. For the insulated roofing profile fasten through each crest. Use cyclone caps and neoprene washers in all crest fixings. Fix side laps with 12 x 20 hex head screws with neoprene washers at approximately 1000mm centres, refer to below:

Fixing to Steel

Crest fixing only - one fixing per crest

50mm panel - 14-10x115 hex head screw


75mm panel - 14-10x135 hex head screw

Fixing to Timber

Crest fixing only - one fixing per crest

50mm panel - 14-10x125 hex head screw


75mm panel - 14-10x150 hex head screw

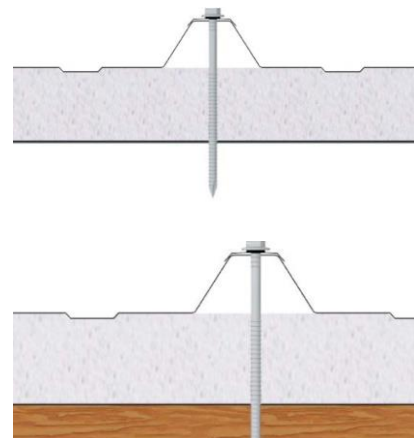

Z Lock Roof Panels

Product Name	Length	Foam Density Kg/m ³	R value m/Kw	Span	Sheet Dimensions	Available Colours
50mm Thickness 950mm Coverage Width Roof Panels	3.0m 3.8m 4.8m 5.4m 6.0m 7.0m 8.0m	16kg/m ³	1.45	4.5m – 5.5m	Top Sheet: 0.55mm Steel Ceiling: 0.55mm Steel	Off White/ Monument
75mm Thickness 950mm Coverage Width Roof Panels	3.5m 3.8m 4.2m 4.8m 5.4m 6.0m 7.0m 8.0m	16kg/m ³	2.15	5.0m – 6.5m	Top Sheet: 0.55mm Steel Ceiling: 0.55mm Steel	Off White

Roof Panels Trimdek Profile

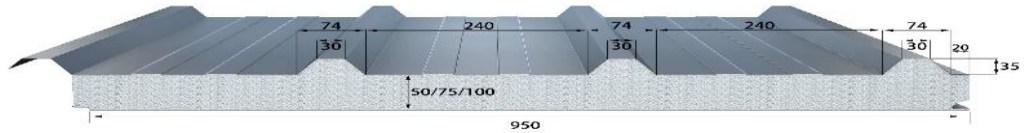







Wall Panels

Product Name	Length	Foam Density Kg/m ³	Steel Face	Available Colours
50mm 1200mm Wall Panels (Coverage: 1150mm)	2.4m 2.7m 3.0m 3.6m 4.2m 4.8m 6.0m	14kg/m ³	0.376mm Steel	Off White
75mm 1200mm Wall Panels (Coverage: 1150mm)	2.4m 2.7m 3.0m 3.6m 4.2m 4.8m 6.0m	14kg/m ³	0.376mm Steel	Off White
Wall Panels Profile				

Surface Profile (Available for Wall or Roof panel surface)





Accessories

Product name	Length	Available Colours	Product Image
Aluminium Channel	6m	Surf Mist	
Aluminium Window Frame	6m	Mill Finish	
Aluminium Door Jam	6m	Surf Mist	
External Round / Square Corner	6m	Surf Mist	
Aluminium Angle	6m	Surf Mist	
Barge Capping	4.8m 6.0m	Surf Mist	


INSTALLATION ADVICE

Corner of insulated wall panels connected by round external corner

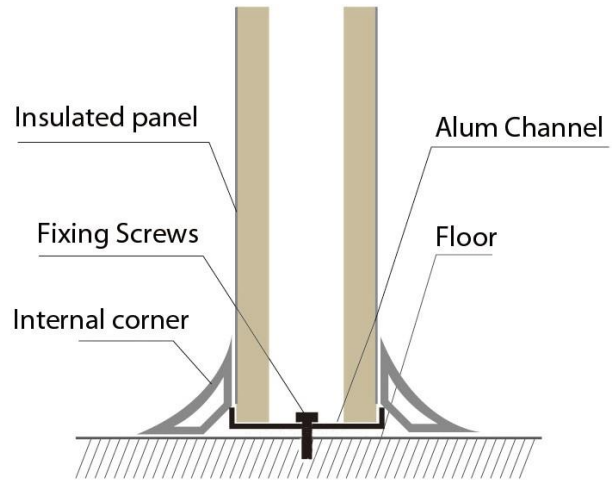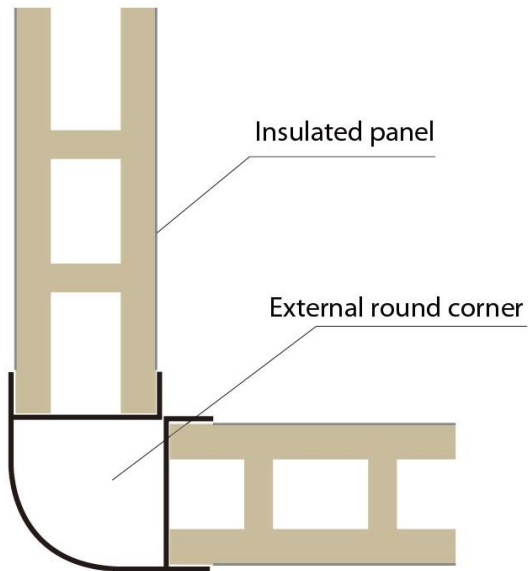

Insulated wall panel and floor connection

T Connection between panels

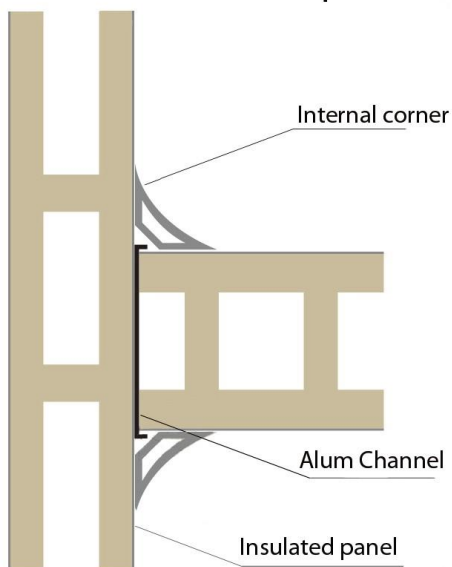

Wall construction with existing wall

